

A PULVERIZING LEVEL OF HIGH QUALITY



RV SERIES ROTATING PULVERIZER

PRIMARY, SECONDARY DEMOLITION AND RECYCLING

The RV Series - the specialists in the field of primary and secondary demolition. Manufactured specifically with HARDOX 400 for maximum wear and tear resistance, the RV hydraulic rotating pulverizers come equipped with a regenerative circuit for ultra responsive opening and closing of their powerful jaws. The RV series is further strengthened by a hydraulic rotation (360°) that allows maximum precision for pulverizer placement in any working condition.

- Featuring an innovative "PRV" (Pressure Relief Valve) that protects the pulverizer from high pressure.
- Reinforced strength and durability from being manufactured with HARDOX 400.
- A reversed cylinder for ultimate rod protection.
- A fast-action valve.
- Interchangeable blades.
- An innovative interchangeable teeth system.



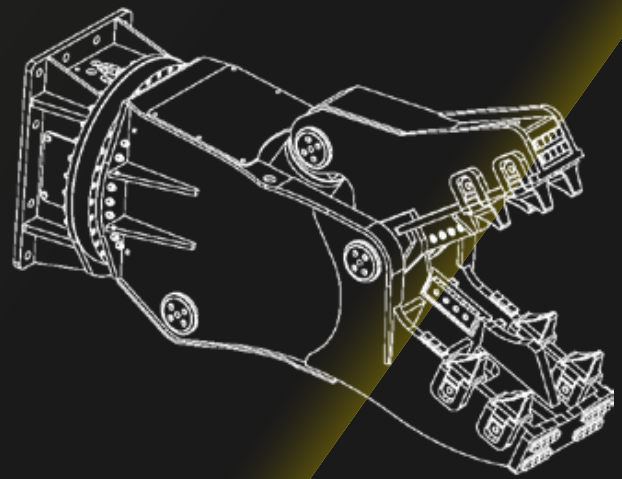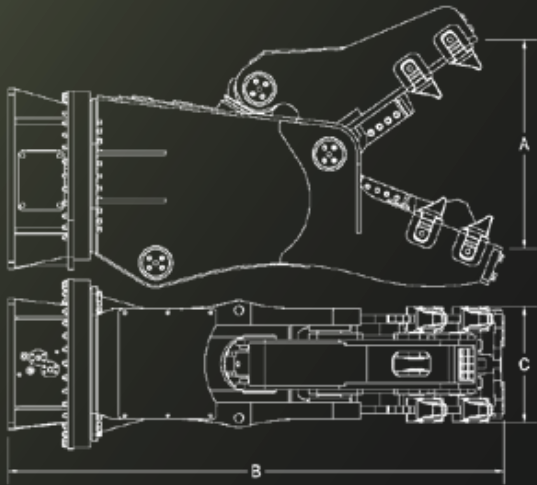

MODEL RV	U.M.	RV 6	RV 10	RV 16	RV 20	RV 25	RV 30	RV 40	RV 60	RV 80	RV 110
OPENING (A)	mm	520	630	780	820	910	1040	1130	1280	1350	1720
	in.	20	25	30	32	36	41	45	50	53	68
LENGTH (B)	mm	1410	1900	2330	2390	2510	2660	2850	3230	3400	3800
	in.	55	75	92	94	99	105	112	127	134	150
WIDTH (C)	mm	340	380	460	480	480	510	550	660	620	650
	in.	13,4	15	18,1	18,9	18,9	20,1	21,65	25,98	24,4	25,6
EXCAVATOR WEIGHT	Ton	7/12	9/15	15/20	18/26	24/32	30/40	38/55	50/80	70/90	90/120
	lbs	15432/ 26455	19842/ 33069	33069/ 44092	39683/ 57320	52911/ 70548	66139/ 88185	83776/ 121254	110231/ 176370	154324/ 198416	198416/ 264555
EQUIPMENT WEIGHT	Kg	600	1050	1610	1900	2580	3040	3940	6000	7800	9950
	lbs	1323	2315	3549	4189	5688	6702	8333	13228	17196	21936
MAX PRESSURE	Bar	250	310	320	320	320	320	320	320	330	340
	psi	3625	4496	4641	4641	4641	4641	4641	4641	4786	4931
OIL MAX CAPACITY	L/min	80/100	180/220	180/220	200/240	250/300	300/350	300/350	300/350	400/500	500/600
	gal/min	21/26	47/58	47/58	52/63	66/79	79/92	79/92	79/92	106/132	132/158
ROTATION OIL PRESSURE	Bar	60	60	60	60	60	60	60	100	100	100
	psi	870	870	870	870	870	870	870	1450	1450	1450
ROTATION OIL CAPACITY	L/min	10.	30	30	30	30	30	30	60	60	60
	gal/min	2,7	8	8	8	8	8	8	16	16	16